

Nice Premium Toolless Speakers

Elevated Audio Performance

Premium Toolless Speakers

Discover amazing audio performance with Premium Toolless Speakers by Nice. Designed with superior materials and engineered to deliver rich, dynamic, and crystal clear sound for modern media–home theaters, music streaming, gaming, and more. Nice Premium Toolless Speakers elevate audio performance to new heights.

AccuAim tweeters

Proprietary AccuAim technology enables precise, lockable tweeter positioning for enhanced phase accuracy.

Advanced materials

Black Kevlar woofers and aluminum/ magnesium tweeters* deliver explosive dynamics and a rich soundstage.

Proportionally massive tweeters Larger tweeters–up to 30mm*– lower the crossover point for

exceptional imagery and detail.

XMag pole piece

Longer pole piece on every model maintains a stable magnetic field for the driver, ensuring precise linearity and accurate sound reproduction.

5 Toolless installation

ViseLock[™] designed by Swarm toolless mounting system provides secure, fast installations–up to 75% faster than conventional mounting systems.

(Speaker interior)



See the complete product family of Audio Solutions from Nice



Electroplated painted steel grills resist rust and paintable. Included with each speaker. Nice Premium Toolless Speakers are an evolution of SpeakerCraft–the inventor of the architectural speaker.



Elevated audio performance for every space

The Nice Premium Toolless Speaker family are voiced to provide an outstanding audio solution for almost any speaker installation from sourround sound home theaters, to dedicated gaming rooms, or whole-home distributed audio. Bring stereo sound to small spaces with dual tweeter models. Take the entertainment outside with the IP66 all weather rated model– perfect for covered patios.

SERIES 3




SERIES 2



SERIES 1



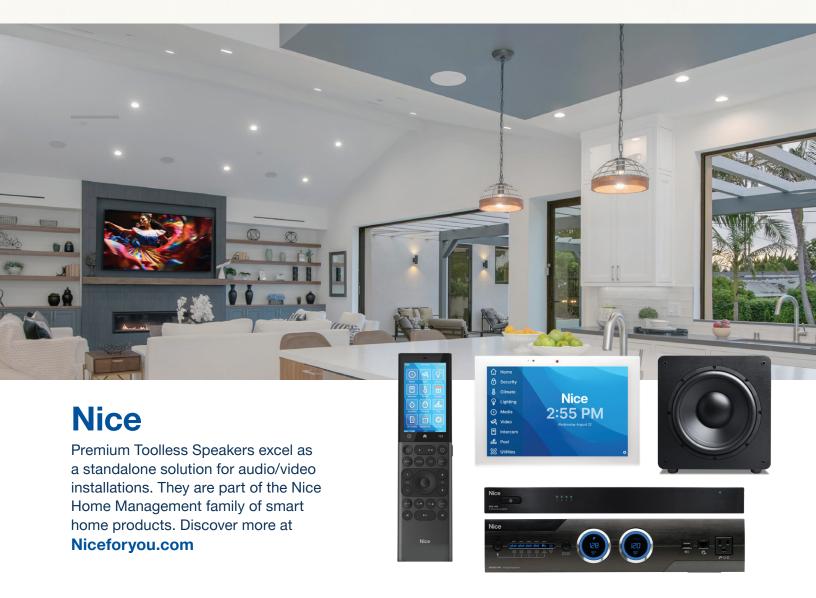

Nice

Premium Toolless Speaker Specifications

| Series 3 delivers premium performance for elevated audio experiences in any listening space. | | | | | | | | |
|--|--------------------------------|--------------|-------------------|---------|--------------|---|--|--|
| MODEL | SC3-IC6 | SC3-IC6-TILT | SC3-IC8-DT | SC3-IC8 | SC3-IC8-TILT | SC3-IW5-LCR | | |
| Cutout Size | 8 ¼ inch (210 mm) | | 9 ¾ inch (248 mm) | | | 7 ½ inch H x 14 ¼ inch W (190 mm x 362 mm) | | |
| Woofer Size | 6.5 inch | | 8 inch | | | 2 X 5.25 inch | | |
| Tweeter Size | 1 ¼ inch (30mm) | | | | | | | |
| Frequency Range | 43Hz-20 kHz | | 36Hz-20 kHz | | | 42Hz-20 kHz | | |
| Sensitivity | | 90 dB SPL | 92 dB SPL | | | 90 dB SPL | | |
| Recommended Power | 50-145 Watts | | 50-170 Watts | | | 40-145 Watts | | |
| Impedance | 8 Ohm nominal; 6.2 Ohm minimum | | | | | | | |

SC3 Series speakers have black kevlar woofers and aluminum/magnesium dome tweeters. Warranty period of 5 years.

| Series 2 is the solution for immersive gaming, streaming and distributed audio. | SC2-IC6 | SC2-IC6-TILT | SC2-IC8 | SC2-IW5-LCR |
|--|-------------|--------------|-------------------|--|
| MODEL | 002 100 | 002 100 1121 | 002 100 | 002 1110 2011 |
| Cutout Size | 8 ¼ inch | (210 mm) | 9 ¾ inch (248 mm) | 7 ½ inch H x 14 ¼ inch W (190 mm x 362 mm). |
| Woofer Size | 6.5 | inch | 8 inch | 2 x 5.25 inch |
| Tweeter Size | 1 inch | (25mm) | 1 ¼ inch (30mm) | 1 inch (25mm) |
| Frequency Range | 45Hz-20 kHz | 46Hz-20 kHz | 40Hz-20 kHz | 43Hz-20 kHz |

| Frequency Range | 45Hz-20 KHz | 46HZ-20 KHZ | 40Hz-20 KHz | 43HZ-20 KHZ | | |
|-------------------|--------------------------------|-------------|--------------|--------------|--|--|
| Sensitivity | 89 | dB | 90 dB SPL | 89 dB SPL | | |
| Recommended Power | 30-135 | 5 Watts | 50-150 Watts | 40-130 Watts | | |
| Impedance | 8 Ohm nominal; 6.2 Ohm minimum | | | | | |

SC2 Series speakers have anodized ceramic/aluminum woofers and deep anodized ceramic/aluminum dome tweeters. Warranty period of 5 years.











MODEL SC1-IC6 SC1-IC6-DT SC1-IC6-TILT SC1-IC6-AW **Cutout Size** 8 1/4 inch (210 mm) Woofer Size 6.5 inch **Tweeter Size** 1 inch (25mm) **Frequency Range** 45 Hz - 20 kHz Sensitivity 89 dB **Recommended Power** 30W - 130 Watts Impedance 8 Ohm nominal; 6.2 Ohm minimum

SC1 Series speakers have injected polypropylene woofers and silk dome tweeters. Warranty period of 5 years.